



PRODUCT CATALOG 2024



DEAR CUSTOMER

We hope you will find this 2024 KEOFITT Product Catalog helpful identifying the right KEOFITT product for your sampling application.

At KEOFITT we pride ourselves with the fact that “All we do is sampling!”. This is still true now more than 40 years after the company was founded.

Being the world market’s only true specialist KEOFITT has developed the widest and deepest product range available for hygienic, sterile and aseptic sampling of liquids in all industries.

Further information can be found at www.keofitt.dk or by contacting your local KEOFITT distributor.



KEOFITT SESAME

Taking the successful design of the classic KEOFITT valves to the third millennium: The patented KEOFITT SESAME™ is the only steam-sterilizable sampling valve in the world to completely eliminate the usually unavoidable dead-space involved with the steam-inlet connection.


This gives you:

- No open steam inlet while sampling: No risk of steam condensate or other leftovers secretly contaminating your sample.
- Minimal volume in valve chamber when sampling: Minimal sample size required.
- Unique, incorporated sterilization of the area behind the membrane and the seal between the valve head and the valve chamber: No risk of cross-contamination from the valve actuator area.
- Increased efficiency during sterilization due to steam flow angle: Optimal sterilization of valve seat in minimum time.
- Unique, incorporated CIP/SIP control valve: Eliminates need for additional control valve in most cases.
- Fully drainable even when positioned upside-down in the bottom of a tank: More than just the best-ever sampling valve design, this makes it the best designed bottom/harvest valve in the marketplace.




HOW IT WORKS


NORMAL POSITION




STEAM



SAMPLE





STEAM




ADVANTAGES

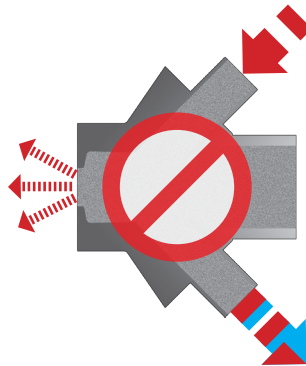1. Sample will never spray out through the steam inlet during sampling. With normal valves, this happens when the operator forgets to mount the cap or the cap disconnects.
2. It is not possible to unintentionally send steam or CiP fluids into the process line, as the sample seat and the steam seat cannot open simultaneously.



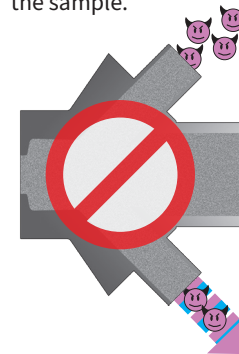3. This is a risk with all other valves as the steam inlet is open even during sampling. Aseptic sampling in a closed system cannot be compromised in case the operator leaves the steam inlet open during sampling. Other valves will open for sampling even if steam inlet is open allowing airborne contamination of the sample.



KEOFITT SESAME™ SAMPLING VALVE

The KEOFITT SESAME™ Sampling Valve is KEOFITT's newest and patented dual-seat sampling valve. Truly unique in the market, it offers optimal CIP and SIP conditions while also incorporating steam supply control and completely eliminating the steam inlet dead-space in other designs.

The unique feature of this valve is in its membrane design which incorporates two separate seats for sampling and sterilizing/sanitizing, respectively. The second seat is located in the area sealing off the valve head. This design allows the sealing area to be sterilized along with the valve chamber prior to each sampling procedure. Furthermore, no separate inlet is required, thus eliminating any dead space while sampling.

The KEOFITT SESAME™ valve is designed for sampling of low or medium viscosity products in the range of 0-1,000 cP with particles less than 3 mm in diameter. Sampling of more viscous liquids is possible, only will it take longer (depending on process pressure). The double-seat SESAME™ valve is used in a range of applications such as brewery, dairy, pharmaceutical and biotechnological companies, with a wide range of products such as:

- Medical Solutions
- Filtered and Unfiltered Beer
- Creams and Lotions
- Unprocessed Milk
- Perfume



[illegible]













KEOFITT SESAME VALVE - HEADS

SESAME HEADS	KEOFITT SESAME VALVE - HEADS			
		TYPE H TURN KNOB 0-10 BAR	TYPE Q LEVER HANDLE 0-10 BAR	TYPE N PNEUMATIC 0-10 BAR
	SILICONE	 890041	 890043	 890044
	EPDM	 890041E	 890043E	 890044E
	PTFE	 895541	 895543	 895544

KEOFITT SESAME INGOLD VALVE - HEADS

SESAME INGOLD HEADS	KEOFITT SESAME INGOLD VALVE - HEADS			
		TYPE H TURN KNOB 0-10 BAR	TYPE Q LEVER HANDLE 0-10 BAR	TYPE N PNEUMATIC 0-10 BAR
	INGOLD I40 PTFE	 893141PTFE	 893143PTFE	 893144PTFE
	INGOLD I52 PTFE	 893241PTFE	 893243PTFE	 893244PTFE

KEOFITT SESAME - PARTS & ACCESSORIES

SESAME PARTS & ACCESSORIES	O-RINGS	 300119 20.24X2.62 FDA	 400208 EPDM 60X3	 400308 EPDM 42X3	 550184 FESTO	 880830 EPDM 20.35X1.78			
	MEMBRANES	 890051 SILICONE	 890052 EPDM	 890055 PTFE	 895531 PTFE (I40)	 895532 PTFE (I52)			
	FOR VALVE HEADS	 600170 LEVER HANDLE N	 600370 LEVER HANDLE Q SELF-CLOSING	 880255 TOOL FOR PTFE	 890170 LEVER HANDLE Q	 890370 LEVER HANDLE Q SELF-CLOSING			
	FOR HOSE PIECE	 550002 PTFE QC 0.5M	 550003 PTFE QC 1.0M	 550057 KÄRCHER ADAPTER	 600062 RUBBER CAP	 800017 QC SPIKE BAG HOLDER	 800053 QC/QC W9	 800058 QC COIL	 800059 QC XL COIL
		 800061 QC PLUG	 800070 QC STEEL PIPE	 800082 QC HOSE BARB 3/8	 800083 QC TC	 800086 QC W9 WITH M4 HP	 800091 QC PTFE	 800171 QC ADAPTER HP/ THREAD	 900045 QC SYRINGE INJECTION

SESAME PARTS & ACCESSORIES								
FOR MINI TRI-CLAMP								
300021 CLAMP PTFE 10/8	550002.2 PTFE QC/TC 0.5M	550003.2 PTFE QC/TC 1M	550004 PTFE TC 0.5M	550005 PTFE TC 1.0M	800014 ADAPTER TC/1"	900096 ADAPTER HP/TC	900097 ADAPTER M4 HP/TC	
MISC.								
700108 HP W9 F/WELDING	800052 HP/HP W9	900031 HP W9/ MALE THREAD M12X1	890063 SINGLE ST. ST.	890064 DOUBLE ST. ST. CHAIN	900047 TUBE PTFE 10/8			
900074 GASKET EPDM 3/4"	900087 GASKET EPDM 1/2"	900091 GASKET EPDM 1"	900092 GASKET EPDM 2"	900075 CLAMP RING 1/2"	900086 CLAMP RING 1"	900189 CLAMP RING FOR SESAME VALVE	900021 MINI BLIND CAP	

KEOFITT CLASSIC

Coaxial steam sterilizable design with separate inlet for SIP and CIP: The reference for hygienic and microbiological sampling for four decades, this is the original, in-situ sterilizable sampling valve that continues to revolutionize the field of sterile sampling.

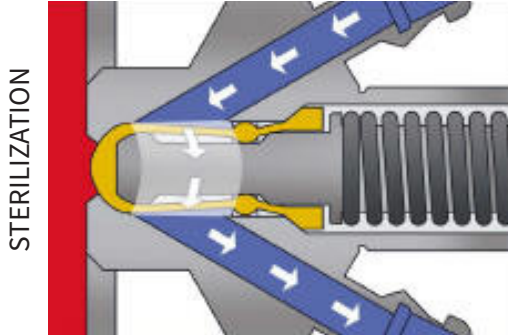
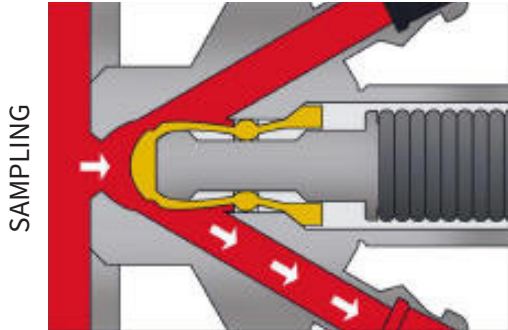
Refined over the years - inside electro-polish being the latest addition - it remains the most popular and best selling valve in the market by far. It is based on KEOFITT's unique, patented membrane and is used in more than 300,000 sampling points worldwide.

Available in several models/sizes:

- W9 (ID 9 MM)
- INGOLD (ID 9 MM)
- 4KAI (ID 5 MM)
- W15 (ID 15MM)
- W25 (ID 25MM)



HOW IT WORKS



KEOFITT CLASSIC W9 SAMPLING VALVE

The KEOFITT CLASSIC W9 Sampling Valve is considered the father of all steam-sterilizable sampling valves. Refined through 40 years of experience it remains KEOFITT's most popular sampling valve. Designed for the sampling of medium viscosity products in the range of 0-1000 cP with particles less than 3 mm in diameter, it covers most needs for liquid sampling. Sampling of more viscous liquids is possible, only will it take longer (depending on process pressure).

This valve is used in a range of industries such as brewery, dairy, pharmaceutical and bio-tech for products such as:










- Medical solutions
- Filtered Beer
- Creams and lotions
- Unprocessed milk

Besides the selection of the Valve Body and the Valve Head there are three different membrane materials to choose from: Silicone, EPDM and PTFE.

Accessories include quick couplings for the connection of tubing, piping and more.



KEOFITT CLASSIC W9™ SAMPLING VALVE - BODIES











W9™ BODIES		WELDING BODIES					CONNECTION BODIES							
		TANK WELDING	PIPE WELDING 1"	PIPE WELDING NW25	IN-LINE VERTICAL	IN-LINE HORIZONTAL	VARIVENT Ø50	VARIVENT Ø68	MINI CLAMP	CLAMP 1" & 1 1/2"	CLAMP 2"	CLAMP 3"	THREAD M28X1,5	
	HOSE PIECE	 850001	 850011	 850014	 850027*	 850028*	 850008	 850009	 850036	 850021	 850003	 850004	 M28X1.5 850031 DIN 11851 DN 10 850040	
	1/2" TRI-CLAMP	 850006	 850010	on request	on request	on request	 850020	 850013	 850039	 850022 850025	 850005 850026	on request	on request	
	THREAD M16X1,5	 850015	 850016	 850018	on request	on request	on request	on request	on request	on request	 850024	on request	on request	 850037
	1/2" WELDING ENDS	 850007	 850019	on request	on request	on request	on request	on request	on request	on request	on request	on request	on request	on request

* ON REQUEST ONLY!



KEOFITT CLASSIC W9™ SAMPLING VALVE - HEADS

W9™ HEADS		TYPE H TURN KNOB 0-10 BAR (FFKM 0-6 BAR)	TYPE H TURN KNOB W/ MICROPORT 0-10 BAR	TYPE K KEY RING 0-10 BAR (FFKM 0-6 BAR)	TYPE K KEY RING W/OPT. MICROPORT 0-10 BAR	TYPE Q LEVER HANDLE 0-10 BAR (FFKM 0-6 BAR)	TYPE N PNEUMATIC 0-10 BAR (FFKM 0-6 BAR)	TYPE N PNEUMATIC, ADJUSTABLE 0-10 BAR (FFKM 0-6 BAR)	TYPE B NO SPRING 0-12 BAR(G)
	SILICONE								
		600041	600048	600042	600049	600043	600044	600045	600047
	EPDM								
		600041E	600048E	600042E	600049E	600043E	600044E	600045E	600047E
	PTFE		on request		on request				
		855541		855542		855543	855544	855545	855547



KEOFITT CLASSIC W9™ - PARTS & ACCESSORIES

W9™ PARTS & ACCESSORIES	O-RINGS	 400208 EPDM 60X3	 400308 EPDM 42X3	 550184 FESTO	 600825 SILICONE 7.1X1.6	 600825E EPDM 7.1X1.6	 800830 SILICONE 10.3X2.4	 800830E EPDM 10.3X2.4	 800859 SILICONE 7.5X2.5	 900829 EPDM 21X4
	MEMBRANES	 600051 SILICONE	 600052 EPDM	 600251 SILICONE MP	 600252 EPDM MP	 850055 PTFE				
	FOR THREAD M16X1.5	 700061 STEEL CAP	 700062 HP W9 16X1.5	 700070 TUBE FITTING WL	 700071 TUBE FITTING PTFE	 700084 BARB 4MM	 700085 BARB 6MM			
	FOR HOSE PIECE	 550002 PTFE QC 0.5M	 550002.2 PTFE QC/TC 0.5M	 550003 PTFE QC 1.0M	 550003.2 PTFE QC/TC 1.0M	 550057 KÄRCHER ADAPTOR	 600062 RUBBER CAP	 800017 QC SPIKE BAG HOLDER	 800053 QC/QC W9	 800058 COIL
		 800059 XL COIL	 800061 QC PLUG	 800070 QC STEEL PIPE	 800082 QC HOSE BARB 3/8	 800083 QC TC	 800084 QC FOR CO2/O2 MEASUREMENTS	 800085 QC W9 MALE LUER LOCK	 800095 QC W9 FEMALE LUER LOCK	 800086 QC W9 WITH M4 HP
		 800088 QC HOSE BARB Ø4	 800091 QC W/HOSE BARB FOR PTFE 10/8	 800171 QC PTFE M16X1.5	 900031 HP MALE THREAD M12	 900045 QC SYRINGE INJECTION				

W9™ PARTS & ACCESSORIES

KIT CLASSIC W9 - PARTS & ACCESSORIES									
FOR MINI TRI-CLAMP									
	300021 CLAMP PTFE 10/8	550004 PTFE TC 0.5M	550005 PTFE TC 1.0M	800014 ADAPTER TC/1"	900096 ADAPTOR W9/W15 HP/TC	900097 ADAPTER M4 HP/TC			
FOR VALVE HEADS									
	600076 KEY RING	600149 BUSHING	600255 TOOL PTFE	900018 TOMMY BAR	600170 LEVER HANDLE Q/N	600370 LEVER HANDLE SELF-CLOSING			
MISC.									
	600063 SINGLE ST. ST. CHAIN	600064 DOUBLE ST. ST. CHAIN	600066 SINGLE ST. ST. CHAIN W/HOOK	400166 PROXIMITY SENSOR	600266 PROXIMITY SENSOR	600267 PROXIMITMOUNTING KIT	700108 HOSE PIECE	800052 HOSE PIECE/ HOSE PIECE	800075 WELDING PIECE FOR PTFE
									
	850840 PINOL SCREW	900008 SOCKET ALU-TANKS	900022 NEEDLE	900047 TUBE PTFE 10/8	900069 WICK W9 VALVE MP	900021 BLIND CAP	900076 BLIND CAP 1"		
									
	900074 GASKET EPDM 3/4"	900087 GASKET 1/2"	900091 GASKET EPDM 1"	900092 GASKET EPDM 2"	900093 GASKET EPDM 3"	900075 CLAMP RING 1/2"	900086 CLAMP RING 1"	900186 CLAMP RING 2"	

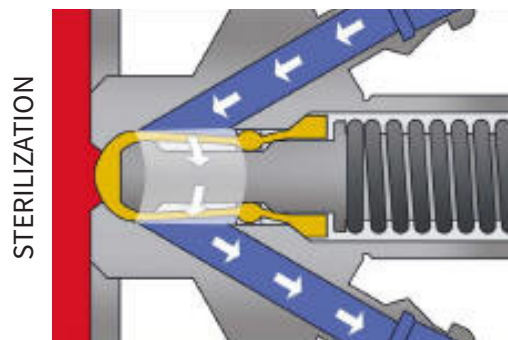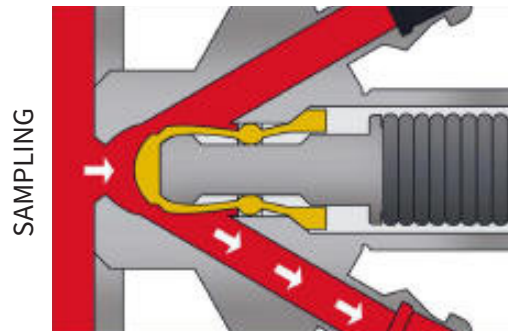HOW IT WORKS



KEOFITT CLASSIC INGOLD SAMPLING VALVE

The KEOFITT CLASSIC INGOLD sampling valve is designed to fit bio-connectors type Ingold®. Designed for the sampling of medium viscosity products in the range of 0-1000 cP with particles less than 2 mm in diameter, it covers most needs for liquid sampling. Sampling of more viscous liquids is possible, only will it take longer (depending on process pressure).

This valve is used in a range of industries such as brewery, dairy, pharmaceutical and bio-tech for products such as:

- Medical solutions
- Filtered Beer
- Creams and lotions
- Unprocessed milk

Besides the selection of the Valve Body and the Valve Head there are three different membrane materials to choose from: Silicone, EPDM and PTFE.

Accessories include quick couplings for the connection of tubing, piping and more.




KEOFITT CLASSIC INGOLD SAMPLING VALVE - BODIES & HEADS



INGOLD BODIES					INGOLD HEADS							
					TYPE H TURN KNOB 0-10 BAR(G)		TYPE Q LEVER HANDLE 0-10 BAR(G)		TYPE N LEVER HANDLE PNEUMATIC 0-10 BAR(G)		TYPE N PNEUMATIC, ADJUSTABLE 0-10 BAR	
					SILICONE	310041	320041	310043	320043	310044	320044	on request
					EPDM	310041E	320041E	310043E	320043E	310044E	320044E	on request
					PTFE	315541	325541	315543	325543	315544	325544	on request

* OTHER PORT LENGTH - AVAILABLE ON REQUEST

KEOFITT CLASSIC INGOLD - PARTS & ACCESSORIES

INGOLD - PARTS & ACCESSORIES	O-RINGS	 300118 EPDM 20.24X2.62	 300119 20.24X2.62 FDA	 550184 FESTO							
	MEMBRANES	 310051 SILICONE (I40)	 310052 EPDM (I40)	 310055 PTFE (I40)	 320051 SILICONE (I52)	 320052 EPDM (I52)	 320055 PTFE (I52)				
	FOR MINI TRI-CLAMP	 300021 CLAMP PTFE 10/8	 550004 PTFE TC 0.5M	 550005 PTFE TC 1.0M	 800014 ADAPTER MINI CLAMP/1" CLAMP	 800083 QC TC	 900096 ADAPTER HP/TC	 900097 ADAPTOR M4 HP/TC			
	VALVE HEADS	 300255 TOOL PTFE (I40/I52)	 550002.2 PTFE TUBING W/ QC/TC 0.5M	 550003.2 PTFE TUBING W/ QC/TC 1 M	 600149 BUSHING	 600170 LEVER HANDLE Q/N	 600370 LEVER HANDLE SELF-CLOSING	 850840 PINOL SCREW F/ W9 HEAD	 900018 TOMMY BAR	 900074 GASKET EPDM 3/4"	 900087 GASKET EPDM 1/2"
	MISC.	 320530 ADAPTOR 30MM (I52)V	 320540 ADAPTOR 40 MM (I52)	 320830 ADAPTOR PTFE 50MM (I52)	 400166 PROXIMITY SWITCH FOR M4/ W9	 600266 PROXIMITY SENSOR W9 CLOSED POS.	 600267 PROXIMITY SENSOR W9 MOUNTING KIT	 700108 HOSE PIECE W9	 900021 BLIND CAP FOR MINI CLAMP	 900075 CLAMP RING 1/2"	

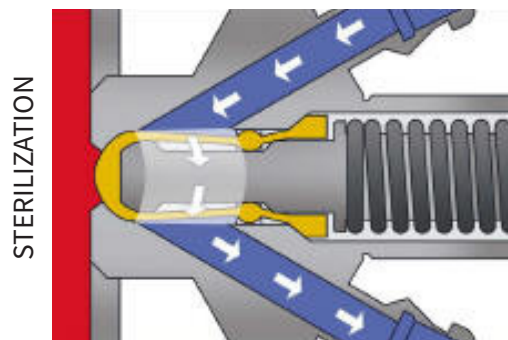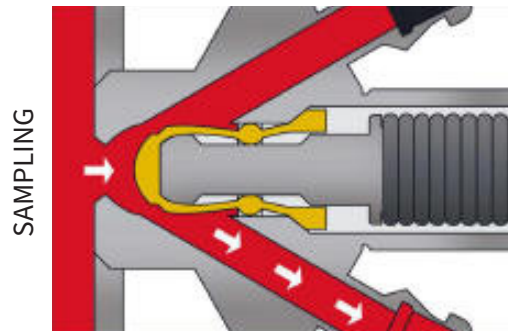HOW IT WORKS



KEOFITT CLASSIC 4KAI SAMPLING VALVE

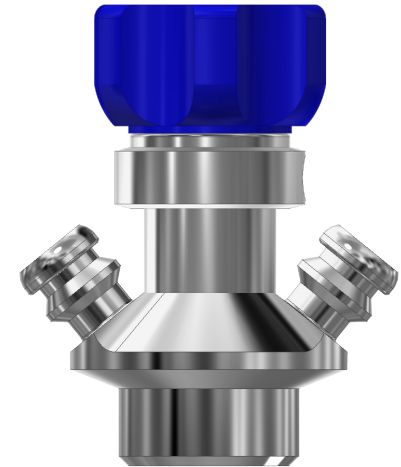
The KEOFITT CLASSIC 4KAI Sampling Valve is the smallest KEOFITT CLASSIC valve available. It is designed for the sampling of low viscosity products in the range of 0-100 cP with particles less than 1.5 mm in diameter. Sampling of more viscous liquids is possible, only will it take longer (depending on process pressure).

This valve is used in a range of industries such as brewery, dairy, pharmaceutical and bio-tech for products such as:

- Water
- Milk
- Medical solutions
- Filtered Beer
- Perfume
- Olive Oil

Besides the selection of the Valve Body and the Valve Head there are three different membrane materials to choose from: Silicone, EPDM and PTFE.

Accessories include quick couplings for the connection of tubing, piping and more.








KEOFITT CLASSIC 4KAI VALVE - BODIES

4KAI BODIES		WELDING BODIES			CONNECTION BODIES	
		TANK WELDING	PIPE WELDING	PIPE WELDING NW25	MINI CLAMP	CLAMP 1" & 11/2"
	HOSE PIECE	 440001	 440011	 440014	 440021	 440022



KEOFITT CLASSIC 4KAI VALVE - HEADS

4KAI HEADS		TYPE H TURN KNOB 0-6 BAR (G)	TYPE Q LEVER HANDLE 0- 6 BAR (G)	TYPE N PNEUMATIC 0-6 BAR (G)
	SILICONE	 440041	 440043	 440044
	EPDM	 440041E	 440043E	 440044E
	PTFE	 445541	 445543	 445544

KEOFITT CLASSIC 4KAI - PARTS & ACCESSORIES

4KAI - PARTS & ACCESSORIES	O-RINGS	 800830 10.3X2.4 SILIC	 800830E EPDM 10.3X2.4	 550184 FESTO	 600825 SILICONE 7.1X1.6						
	MEMBRANES	 400051 SILICONE	 400052 EPDM	 400055 PTFE							
	FOR HOSE PIECE	 550003 PTFE QC 1.0M	 550002 PTFE QC 0.5M	 550057 KÄRCHER ADAPTOR	 600062 RUBBER CAP	 800053 QC/QC W9	 800082 QC HOSE BARB 3/8	 800083 QC TC	 800086 QC W9 WITH M4 HP	 800061 QC PLUG	 800070 QC STEEL PIPE
		 900045 QC SYRINGE INJECTION	 900031 HP MALE THREAD M12	 800058 COIL	 800059 XL COIL	 800091 QC PTFE					
	VALVE HEADS	 900018 TOMMY BAR	 600370 LEVER HANDLE SELF-CLOSING	 600170 LEVER HANDLE Q/N	 400255 TOOL PTFE						
	MISC.	 440064 DOUBLE ST. ST. CHAIN	 900086 CLAMP RING 1"	 900075 CLAMP RING 1/2"	 900047 TUBE PTFE 10/8	 900087 GASKET 1/2"	 900091 GASKET EPDM 1"	 550002.2 PTFE QC/TC 0.5M	 550003.2 PTFE QC/TC 1.0M	 440149 BUSHING FOR 4KAI/BASIX HEAD	 800052 HOSE PIECE/ HOSE PIECE

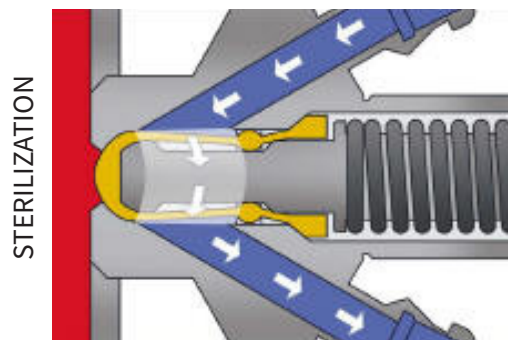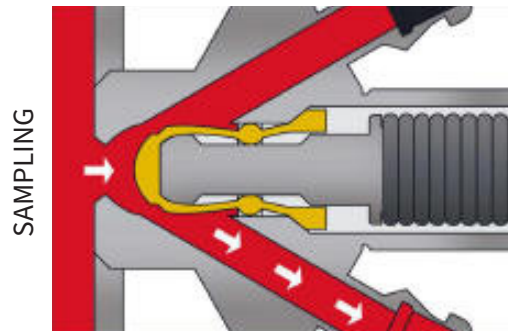HOW IT WORKS



KEOFITT CLASSIC W15 SAMPLING VALVE

The KEOFITT CLASSIC W15 Sampling Valve is designed for high viscosity products in the range of 0-50,000 cP with particles up to 8 mm in diameter. Sampling of more viscous liquids is possible, only will it take longer (depending on process pressure).


This valve is used in a range of industries such as brewery, dairy, pharmaceutical and bio-tech for products such as:

- Yoghurt
- Honey
- Syrup
- Ketchup
- Marmalade
- Creams and lotions
- Fruit pulp products

Available with PTFE membrane.






KEOFITT CLASSIC W15 VALVE - BODIES

W15 BODIES		WELDING BODIES		CONNECTION BODIES			
		TANK WELDING	PIPE WELDING	VARIVENT Ø68	CLAMP 1"	CLAMP 2"	CLAMP 3"
	3/4" TRI-CLAMP						
		860001	860011	860009	860004	860002	860003
3/4" WELDING ENDS		<i>on request</i>	<i>on request</i>	<i>on request</i>	<i>on request</i>	<i>on request</i>	<i>on request</i>
	860007						



KEOFITT CLASSIC W15 VALVE - HEADS

W15 HEADS		TYPE H TURN KNOB 0-10 BAR (G)	TYPE B NO SPRING 0-12 BAR (G)	TYPE N PNEUMATIC 0-10 BAR
				
	PTFE	865541	865547	865544

KEOFITT CLASSIC W15 - PARTS & ACCESSORIES

W15 PARTS & ACCESSORIES						
O-RINGS	 400208 EPDM 60X3	 550184 FESTO				
MEMBRANES	 860055 PTFE					
FOR MINI TRI-CLAMP	 300021 CLAMP PTFE 10/8	 550004 PTFE TC 0.5M	 550005 PTFE TC 1.0M	 800014 ADAPTER TC/1"	 900096 ADAPTER HP/TC	
FOR VALVE HEADS	 600170 LEVER HANDLE Q/N	 600370 LEVER HANDLE SELF-CLOSING	 860255 TOOL PTFE			
MISC.	 900021 BLIND CAP	 900074 GASKET EPDM 3/4"	 900092 GASKET EPDM 2"	 900093 GASKET EPDM 3"	 900075 CLAMP RING 1/2"	 900186 2" CLAMP RING

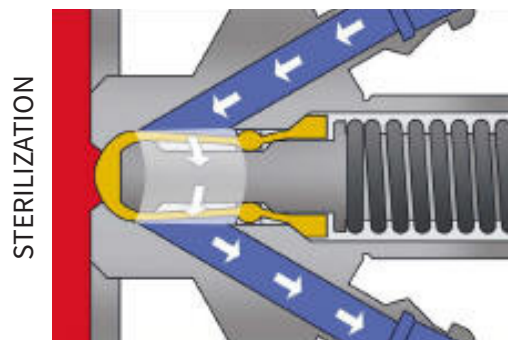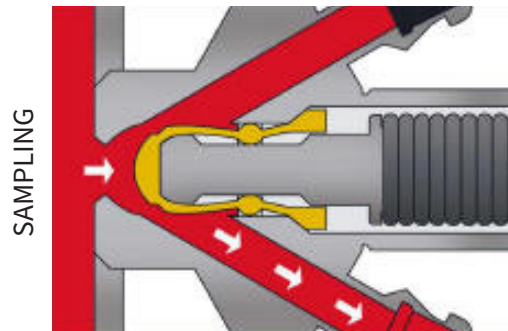HOW IT WORKS




KEOFITT CLASSIC W25 SAMPLING VALVE

The KEOFITT CLASSIC W25 Sampling Valve is the largest KEOFITT sampling valve. Designed for sampling of very high viscosity products in the range of 0-250,000 cP and particles less than 17 mm in diameter. Sampling of more viscous liquids is possible, only will it take longer (depending on process pressure).

This valve is used in a range of industries such as food, dairy, pharmaceutical and bio-tech for products such as:

- Peanut Butter
- Fruit Pulp
- Syrup
- Cellulose
- Fruit Mixed Products
- Cosmetics

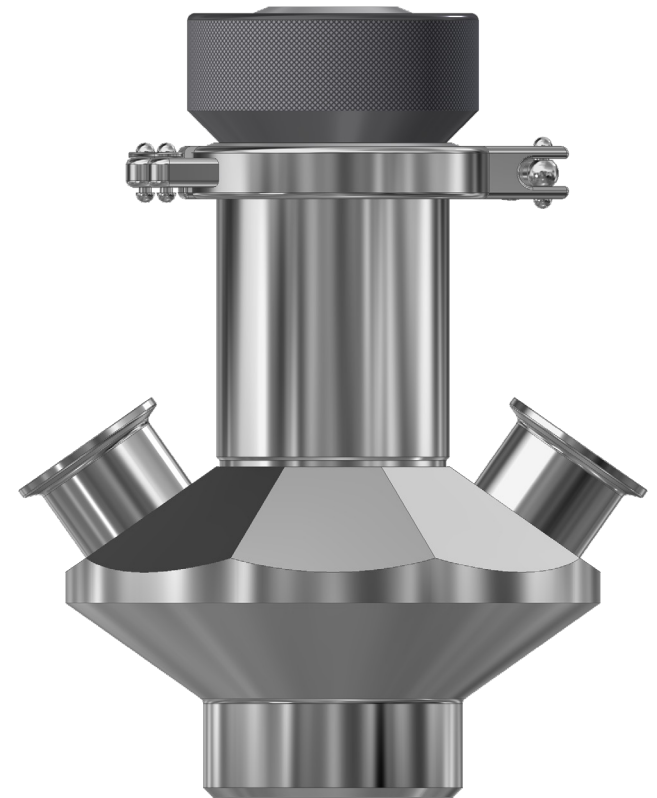Available with PTFE membrane.






KEOFITT CLASSIC W25 VALVE - BODIES

W25 BODIES		WELDING BODIES		CONNECTION BODIES	
		TANK WELDING	PIPE WELDING	VARIVENT Ø68	CLAMP 3"
W25 BODIES	1" CLAMP	 870001	<i>on request</i>	 870009	 870003
	WELDING LINER	<i>on request</i>	<i>on request</i>	<i>on request</i>	<i>on request</i>

KEOFITT CLASSIC W25 VALVE - HEADS

W25 HEADS		TYPE N PNEUMATIC 0-6 BAR	TYPE B NO SPRING 0-12 BAR
		 875544	 875547

KEOFITT CLASSIC W25 - PARTS & ACCESSORIES

W25 PARTS & ACCESSORIES	O-RINGS	 400208 EPDM 60X3	 900091 GASKET EPDM 1"	 900093 GASKET EPDM 3"		
	MEMBRANES	 870055 PTFE				
	FOR VALVE HEADS	 870255 TOOL PTFE				
	MISC.	 800014 ADAPTER TC/1"	 900086 CLAMP RING 1"	 900187 CLAMP RING FOR W25 VALVE		

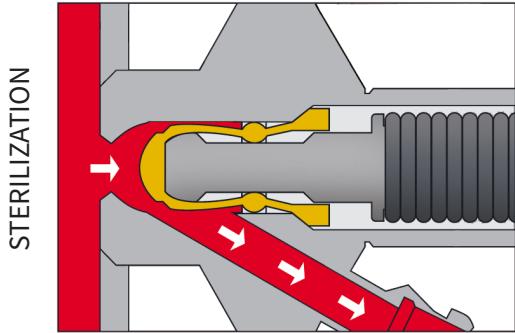
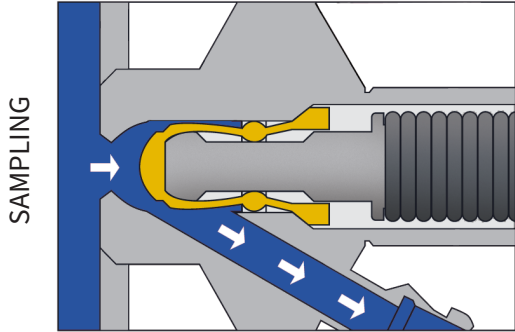
KEOFITT SINGLE-PORT SAMPLING VALVE

Replace your ordinary, non-hygienic sampling cocks with the KEOFITT Single-Port Sampling Valve.

This valve is CIP-able with process CIP and still true to the KEOFITT concept, as it is available with various process connections with manual or pneumatic operation.



HOW IT WORKS



KEOFITT SINGLE-PORT W9™ SAMPLING VALVE

The KEOFITT Single-Port W9™ sampling valve is our solution for CIP-able sampling from less demanding applications. If the KEOFITT Single-Port sampling valve BASIX™ does not cover your need due its smaller size, the 9mm outlet on the Single-Port W9 will do the job. With the W9-solution you have the added benefit of choosing products from a selected range within the W9 product outline.

This valve is designed for sampling of products with a viscosity of 0-1000 cP with particles up to 3 mm in diameter.


The Single-Port W9 valve is usable for simple, hygienic sampling in all industries for products such as:

- Water
- Milk
- Perfume
- Fruit juice

Available in many versions; choose your preferred type of head from our W9 product outline.





KEOFITT W9 SINGLE-PORT BODIES

W9 SINGLE-PORT BODIES		WELDING BODIES		CONNECTION BODIES			
		TANK WELDING	PIPE WELDING	VARIVENT Ø50	VARIVENT Ø68	MINI CLAMP	CLAMP 1" & 1 1/2"
	HOSE PIECE						
		850001-1	850011-1	850008-1	850009-1	850036-1	850021-1
		on request	on request	on request	on request		on request
	1/2" TRI-CLAMP	on request	on request	on request	on request	850039-1	on request
		on request	on request	on request	on request	850039-1	on request

* CHOOSE VALVE HEAD AND PARTS & ACCESSORIES FROM THE W9 SECTION

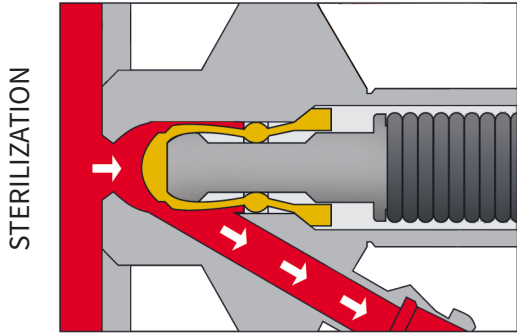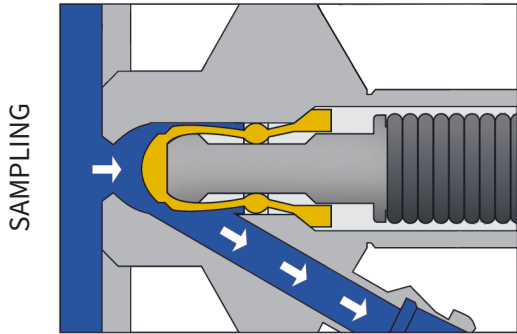HOW IT WORKS



KEOFITT BASIX SAMPLING VALVE

The KEOFITT BASIX™ Sampling Valve is our basic CIP-able sampling valve for less demanding applications. The KEOFITT BASIX™ Sampling Valve is our product category for process CIP-able sampling valves for less demanding applications that require no separate inlet for sterilizing or sanitizing media.

This valve is designed for sampling of low viscosity products in the range of 0-100 cP with particles less than 1,5 mm in diameter.

Basix™ is used for simple, hygienic sampling in all industries for products such as:

- Water
- Milk
- Perfume
- Fruit Juice

Available in manual and pneumatic versions this valve is offered complete as a valve body and valve head combination.





Choose from silicone, EPDM or PTFE membranes.



KEOFITT BASIX™ VALVES

BASIX™ VALVES		MANUAL VALVE				PNEUMATIC VALVE			
		TANK WELDING	PIPE WELDING	MINI CLAMP	1" & 1½" CLAMP	TANK WELDING	PIPE WELDING	MINI CLAMP	1" & 1½" CLAMP
									
	SILICONE	450141	451141	452141	452241	450144	451144	452144	452244
	EPDM	450141EPDM	451141EPDM	452141EPDM	452241EPDM	450144EPDM	451144EPDM	452144EPDM	452244EPDM
	PTFE	450141PTFE	451141PTFE	452141PTFE	452241PTFE	450144PTFE	451144PTFE	452144PTFE	452244PTFE

KEOFITT BASIX™ - PARTS & ACCESSORIES

BASIX™ - PARTS & ACCESSORIES	O-RINGS	 550184 FESTO	 600825 SILICONE 7.1X1.6	 800830 SILICONE 10.3X2.4	 830830E EPDM 10.3X2.4				
	MEMBRANE	 400051 SILICONE	 400052 EPDM	 400055 PTFE					
	FOR HOSE PIECE	 450063 SINGLE ST.ST. CHAIN	 550002 PTFE QC 0.5M	 550003 PTFE QC 1.0M	 550002.2 PTFE QC/TC 0.5M	 550003.2 PTFE QC/TC 1M	 600062 RUBBER CAP	 800058 SAMPLING COIL W9	 800059 SAMPLING COIL XL W9
		 800053 QC/QC W9	 800061 QC PLUG	 800070 QC STEEL PIPE	 800082 QC W9 HOSE ID 7	 800083 QC TC	 800086 QC W9 WITH M4 HP	 800091 QC PTFE	 900045 QC SYRINGE INJECTION
	MISC.	 400255 TOOL FOR MEMBRANE (PTFE)	 440149 BUSHING FOR 4KAI/ BASIX HEAD	 600170 LEVER HANDLE Q/N	 600370 LEVER HANDLE SELF-CLOSING	 800052 HOSE PIECE/ HOSE PIECE W9	 900018 TOMMY BAR	 900031 HP W9/MALE THREAD M12	 900047 TUBE PTFE 10/8MM
		 900075 CLAMP RING 1/2"	 900086 CLAMP RING 1"	 900087 GASKET MINI CLAMP 1/2" EPDM	 900091 GASKET EPDM 1"				

KEOFITT SAMPLING BAGS

This is where you find everything you need to complete your KEOFITT sampling system:

The main products for this category is the unique single-use sampling bag systems allowing safe and aseptic sampling from any type of sampling valve. You can improve sample integrity and convenience immediately by using these products for existing sampling devices – whether they are KEOFITT or not.

The KEOFITT Sampling Bags have all been developed as single-use solutions to the cumbersome and difficult task of taking a representative sample and bringing it safe and clean from the sampling point to the laboratory.

At the same time the KEOFITT Sampling Bags offer convenience and safety in use and higher efficiency in the work process. No prior assembly or cleaning of any components; no glass or metal component is introduced to the production area.

All KEOFITT Sampling Bags are made of medical grade plastics complying with all relevant FDA, USP and ISO regulations for both the food and the pharmaceutical/biotech industries.

The KEOFITT Sampling Bags are delivered separately packed and sterilized by irradiation. In each carton a Radiation Certificate and a Certificate of Conformity are enclosed.

The KEOFITT Sampling Bags are manufactured following strict in-process testing including a test for endotoxins.

The proper performance of all KEOFITT Sampling Bags is supported by a number of validation documents covering SIP'ability, biocompatibility, extractables, USP Class VI, endotoxins, mechanical and chemical properties etc.



KEOFITT SAMPLING BAG™

The brand new single-use KEOFIT Sampling Bag™ is designed to collect liquid process samples in a hygienic, safe and efficient way.

The KEOFIT Sampling Bag™ is suitable for any liquids with very high viscosity in the range of 0-250,000 cP and liquid products with solid particles with a size of up to 15mm in diameter.

Its unique and certified design allows an effective sterilization or disinfection of the complete flow prior to sampling to ensure the integrity of the sample.

The samples will be protected from any air-borne or cross contamination, as they are taken into a closed and hygienic system.

The KEOFIT Sampling Bag™ fits ALL KEOFIT valves - including W15 and W25 valves.

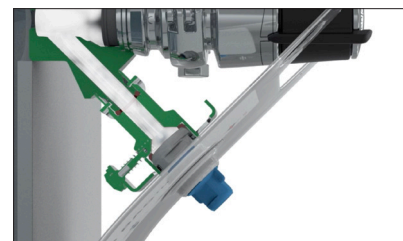
Intended for collecting and storing any samples for microbiological and chemical/physical analysis, it is an ideal solution for food/dairy/beverage/brewing applications.




HOW IT WORKS




Remove the seal from the inlet and outlet and connect the bag to the valve by using the corresponding fitting.



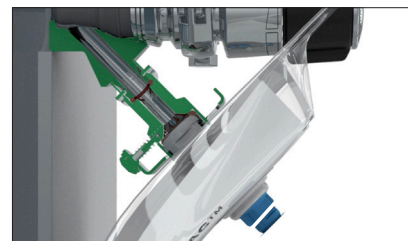Clean/sterilize the flow path (valve and bag) through the valve inlet.



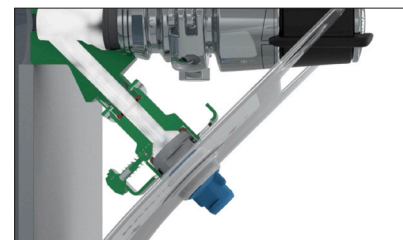Open the bag and the sampling valve to take the sample.



Close the valve and the bag (optional: flush/clean/sterilize again)






Remove the bag and bring it to the lab for analyzing the sample.

KEOFITT SAMPLING BAG™

KEOFITT SAMPLING BAG™	KEOFITT SAMPLING BAG™ INLET		KEOFITT SAMPLING BAG™	
				
	SIZE		ART.NO.	
	1000 ML		151000	
	2000 ML		152000	

PARTS & ACCESSORIES

KEOFITT SAMPLING BAG™ PARTS & ACCESSORIES	FOR KSB INLET	FOR KSB OUTLET
	 150083 QUICK COUPLING KSB INLET FOR HOSE PIECE	 150061 QUICK COUPLING KSB OUTLET STAINLESS STEEL PLUG
	 150085 QUICK COUPLING KSB INLET 1" CLAMP	 150082 QUICK COUPLING KSB OUTLET 3/8" HOSE BARB (CLOSABLE)
	 150088 QUICK COUPLING KSB INLET 1/2" CLAMP	
	 150084 QUICK COUPLING KSB INLET 3/4" CLAMP	
	 150062 QUICK COUPLING KSB INLET STAINLESS STEEL PLUG	

KEOFITT STERILE SAMPLING BAGS

The KEOFITT Sterile Sampling Bag is a sterile, pre-irradiated sampling bag wrapped in a sealed PE-bag. The sterile condition and the closed fluid path enables the user to extract liquid samples from the process line greatly reducing the risk of contaminating the sample from airborne contaminants in the environment compared to using traditional sample recipients.

The KEOFITT Sterile Sampling Bag is the ultimate sampling bag solution based on KEOFITT's renowned high quality and ultra hygienic sampling valve design. It is delivered with either a Mini Tri-Clamp or a KEOFITT W9 Quick Coupling.

The Sterile Sampling Bag is intended for collecting and easy storage of samples for chemical analysis. For microbiological samples the Aseptic Sampling Bag is recommended.

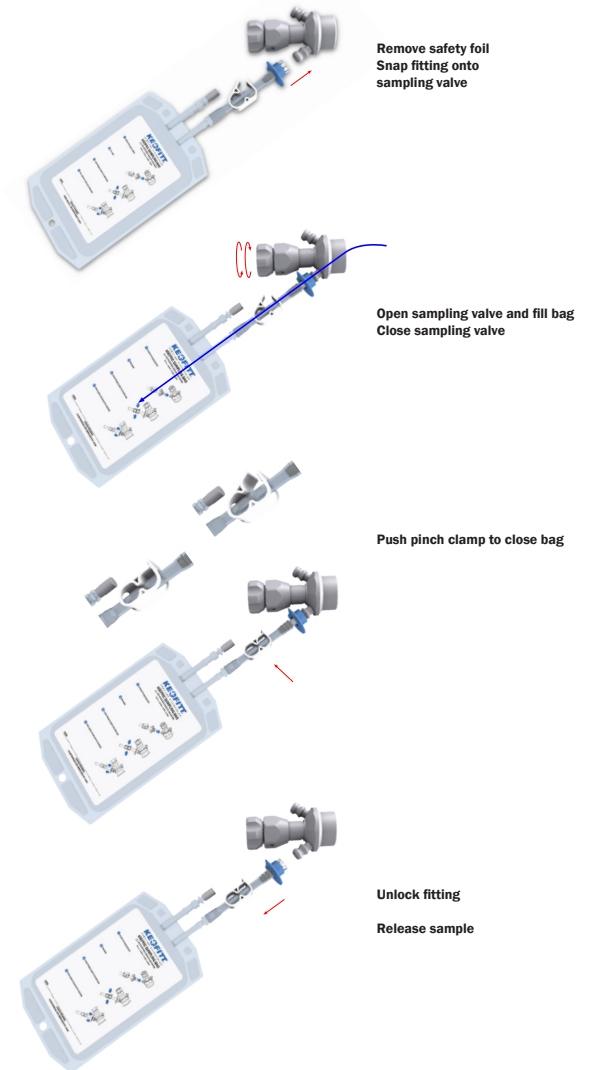
The product to be sampled should have a maximum viscosity of 1000 cP and should not contain particles larger than 3 mm in diameter. Products with higher viscosity may be sampled, only will it take longer.

The KEOFITT Sampling Bag is foreseen with a secondary port with a septum for extracting a sample of the sample or for injecting a substance into the sample. The secondary port also fitted with Luer Lock fittings (male and female) for secure and sterile connection to relevant equipment in a Laminar Air Flow (LAF) bench.



HOW IT WORKS

KEOFITT® STERILE SAMPLING BAG



KEOFITT STERILE SAMPLING BAGS

STERILE SAMPLING BAGS			
		SIZE	ART. NO.
KEOFITT STERILE SAMPLING BAGS	HOSE PIECE	1000 ML	111000
		2000 ML	112000*
			

* ON REQUEST ONLY!

KEOFITT ASEPTIC SAMPLING BAGS

The KEOFITT Aseptic Sampling Bag is a sterile, pre-irradiated sampling bag wrapped in a sealed PE-bag. Contrary to the Sterile Sampling Bag the Aseptic Bag is equipped with a 3-way valve allowing to steam sterilize the bag system before sampling. The sterile condition and this possibility to steam the flowpath in a closed circuit enable the user to extract a truly representative aseptic sample from a liquid process line sampling point in a convenient way.

The KEOFITT Aseptic Sampling Bag is the ultimate sampling bag solution based on KEOFITT's renowned high quality and ultra hygienic sampling valve design. The unique design allows the connection between the sampling valve and the sampling bag to be steam sterilized in place. It is delivered with either a Mini Sanitary Clamp or a KEOFITT W9 Quick Coupling.

The Aseptic Sampling Bag is a single use product intended for collecting and easy storage of samples from true aseptic samples for microbiological and chemical analysis.

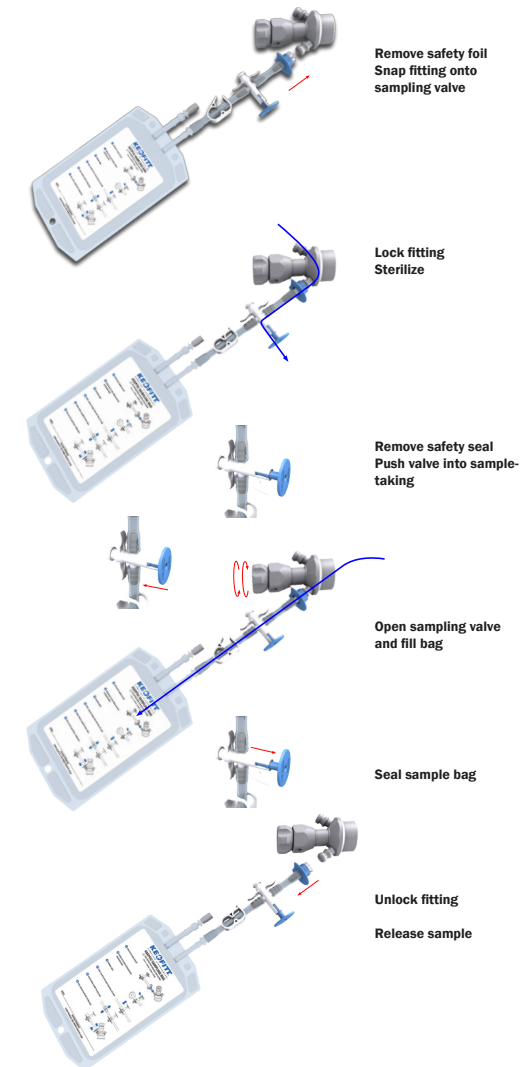
The product to be sampled should have a maximum viscosity of 1000 cP and should not contain particles larger than 3 mm in diameter. Products with higher viscosity may be sampled, only will it take longer.

The Keofitt Sampling Bag is foreseen with a secondary port with a septum for extracting a sample of the sample or for injecting a substance into the sample. The secondary port also fitted with Luer Lock fittings (male and female) for secure and sterile connection to relevant equipment in a Laminar Air Flow (LAF) bench.



HOW IT WORKS

KEOFITT® ASEPTIC SAMPLING BAG



KEOFITT ASEPTIC SAMPLING BAGS

		ASEPTIC SAMPLING BAGS		
			SIZE	ART. NO.
HOSE PIECE			250ML	120250
			500 ML	120500
			1000 ML	121000
			2000 ML	122000
MINI TRI-CLAMP			500 ML	120500TC
			2000 ML	122000TC

KEOFITT SPIKE SAMPLING BAGS

The KEOFITT Spike Sampling Bag is a cost-effective single-use sampling bag to be used where requirements to sterility and storage time are less severe. It features a unique auto-sealing septum allowing thick needles for fast and convenient sampling of most liquids including viscous products.

The KEOFITT Spike Sampling Bag is a multi-layer PP sampling bag manufactured under cleanroom conditions (class C).

The KEOFITT Spike Sampling Bag features a septum, which accepts thick needles (spikes) with up to 2,5 mm internal diameter. This assures a much faster sampling process than otherwise experienced with hypodermic needles. Despite the thick needle the unique septum design assures an auto-sealing effect after collection of the sample.

The KEOFITT Spike Sampling Bag works with the KEOFITT Quick Coupling Spike holder that fits all standard KEOFITT Sampling valves (see Accessories).






KEOFITT SPIKE SAMPLING BAGS


KEOFITT SAMPLING BAGS

SPIKE BAGS		
	SIZE	ART. NO.
	1000 ML	171000


KEOFITT SPIKE SAMPLING BAGS - PARTS & ACCESSORIES

KEOFITT SPIKE SAMPLING BAG PARTS & ACCESSORIES	FOR HOSE PIECE	 400830 SILICONE 5.3X2.4	 800830 SILICONE 10.3X2.4	 800017 QC SPIKE (W9)		
	FOR MINI TRI-CLAMP	 800014 ADAPTOR TC/1"	 800083 QC W9/TC	 900096 ADAPTOR W9/W15 HP/TC	 900075 CLAMP RING 1/2"	
		 900087 GASKET EPDM 1/2"	 900074 GASKET EPDM 3/4"			

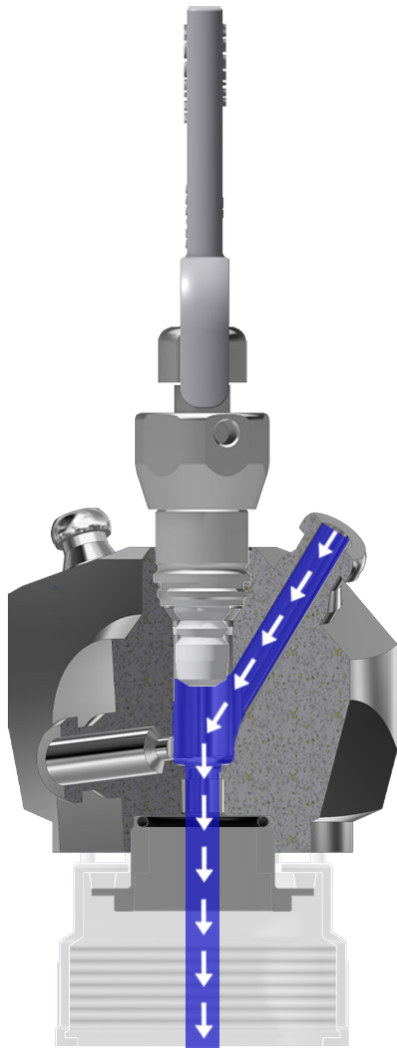SAMPLING



STERILIZATION

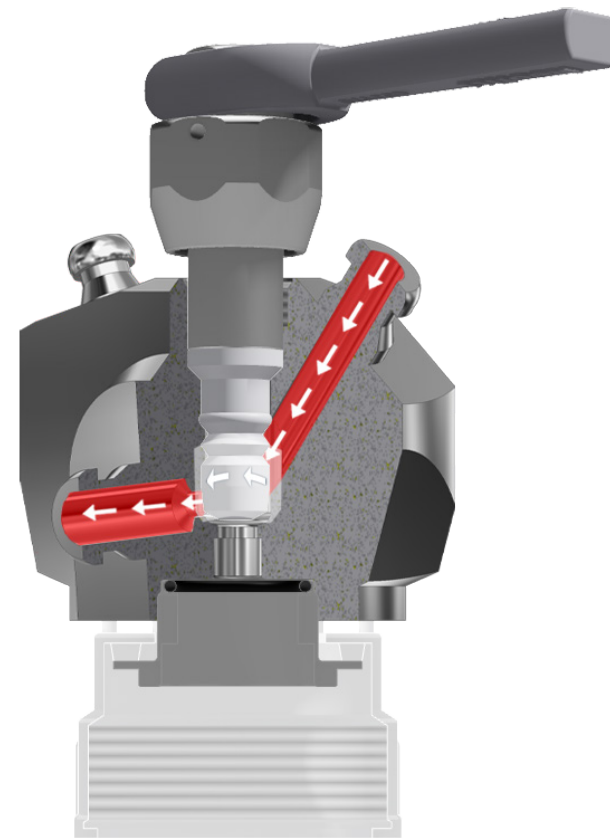

KEOFITT BOTTLE SAMPLING SYSTEMS

The KEOFITT Aseptic System enables the user to take a truly representative aseptic sample. It protects the sample against airborne contamination, while extracting the sample, during transportation and storage.

The standard operating procedure involves steaming the sampling valve with the KEOFITT Aseptic System connected, in order to sterilize the sampling valve and the connection between the sampling valve and the KEOFITT Aseptic System. This procedure ensures the sterilization of the whole flow path in a closed circuit.



The KEOFITT Aseptic System is based on KEOFITT's guaranteed high quality, microbiologically safe valve design. It shall be used with PP sampling bottles (# 260325 / 260525 / 260625 / 260725 / 260825), which are autoclavable, robust and translucent.



SAMPLING BOTTLE SYSTEMS

SAMPLING BOTTLE SYSTEMS	CITY SAMPLING BOTTLE SYSTEMS				
	ASEPTIC SAMPLING SYSTEM FOR BOTTLE SIZES 250-2000ML	ASEPTIC SAMPLING SYSTEM FOR BOTTLE SIZES 4000/5000ML	SAMPLING BOTTLE HEAD W9	SAMPLING BOTTLE HEAD W15	SAMPLING BOTTLE HEAD W25
					
	260005	260006	260030	860030	870030

KEOFITT SAMPLING BOTTLES - PARTS & ACCESSORIES

SAMPLING BOTTLES - PARTS & ACCESSORIES	BOTTLES									
		260325 PP BOTTLE 250ML	260525 PP BOTTLE 1000ML	260625 PP BOTTLE 2000ML	260725 PP BOTTLE 4000ML	260825 PP BOTTLE 5000ML				
	TUBINGS									
		550002 PTFE QC 0.5M	550002.2 PTFE QC/TC 0.5M	550003 PTFE QC 1.0M	550003.2 PTFE QC/TC 1M	550004 PTFE TC 0.5M	550005 PTFE TC 1.0			
	MISC.									
		260327 GASKET PP 250-2000 ML	260427 GASKET PP 4000/5000 ML	260326 LID PP BOTTLE W/HOLE 250-2000 ML	260328 LID PP BOTTLE 250-2000 ML	260426 LID PP BOTTLE W/ HOLE 4000/5000 ML	260428 LID PP BOTTLE 4000/5000 ML	260081 QC F/FILTER ASEPTIC SYSTEM	260122 STERILE FILTER FOR ASEPTIC SYSTEM	260370 FILLING TUBE PTFE
										
		260158 O-RING EPDM 21.89X2.62	260159 O-RING EPDM 24.6X2.4	800014 ADAPTER TC/1"	800053 QC/QC W9	800061 QC W9 ST. ST. PLUG	900096 ADAPTER HP/TC	900097 ADAPTER HP/TC	900021 BLIND CAP MINI CLAMP	900076 BLIND CAP 1" CLAMP
										
	900074 GASKET EPDM 3/4"	900091 GASKET EPDM 1"	900075 CLAMP RING 1/2"	900086 CLAMP RING 1"						

KEOFITT VARIOUS

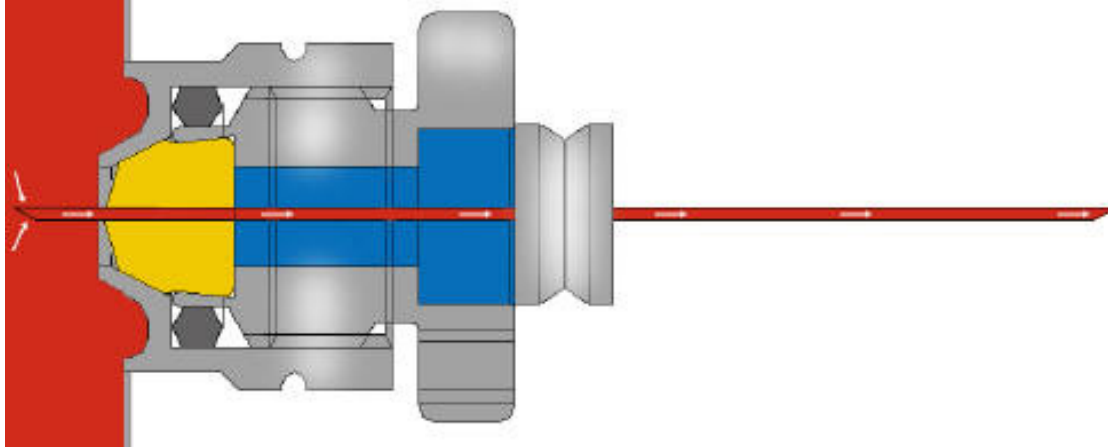
Being the world market's only true specialist KEOFITT has developed the widest and deepest product range available for sampling of liquids in all industries.

To satisfy the specific demands from the different industries KEOFITT has introduced a various special items, such as:

- **Micro Port**
provide an easy and hygienic solution for extracting liquid samples from a production batch using hypodermic needles or syringes.
- **Portable Steam Cleaning Unit**
designed to provide steam for cleaning and disinfecting in sampling locations where a fixed steam supply is not available.
- **Carlsberg Flask vessel system**
designed for the propagation of yeast cultures in a sterile environment and the transfer of the pure yeast culture under sterile conditions.



HOW IT WORKS



KEOFITT MICRO PORT

The KEOFITT MICRO PORT is a re-sealing rubber septum designed to take samples using hypodermic needles or syringes with minimal risk of contamination. Designed for sampling low viscosity products in the range 0-50 cP.

The KEOFITT MICRO PORT is easy to use and maintain, if needle sampling is required.

The Micro Ports are used in a range of business areas, such as brewery, dairy, pharmaceutical and biotechnological industries, with a wide range of products such as:

- Water
- Medical solutions
- Milk
- Filtered Beer
- Perfume
- Olive Oil

Available as a single septum or as a MULTI MICRO PORT with seven septums.




KEOFITT MICRO PORT

		MICRO PORT			MULTI MICRO PORT 49		
		TANK	PIPE WELDING 1"	PIPE WELDING NW25	TANK WELDING 7 X BUTYL MEMBRANE	VARIVENT Ø68 7 X BUTYL MEMBRANE	CLAMP 3" 7 X BUTYL MEMBRANE
MICRO PORT / MULTI MICRO PORT 49	BUTYL (IIR) MEMBRANE	 900056	 900057	 900014	 840001	 840009	 840020
		VARIVENT Ø31	VARIVENT Ø50	VARIVENT Ø68			
		 900026	 900027	 900028			
		MINI CLAMP	CLAMP 1" & 1 1/2"				
		 900059	 900058				

MICRO PORT PARTS & ACCESSORIES								
O-RINGS	 400208 EPDM 60X3	 400408 EPDM 20X3	 900822 EPDM 9.3X2.4	 900824 EPDM 14X4	 900825 EPDM 44.6X2.4			
SEPTUM	 900049 BUTYL							
MISC.	 600065 CHAIN FOR MULTI MICRO PORT	 900077 CHAIN	 840055 FILM MULTI	 840102 INNER PLATE FOR MICRO PORT	 840118 TOOL MULTI	 900054 NEEDLE	 900055 WICK	
	 900075 CLAMP RING 1/2"	 900086 CLAMP RING 1"	 900074 GASKET EPDM 3/4	 900087 GASKET EPDM 1/2"	 900091 GASKET EPDM 1"	 900093 GASKET 3" CLAMP EPDM	 900102 INSERT FOR MICRO PORT	 900441 PLUG

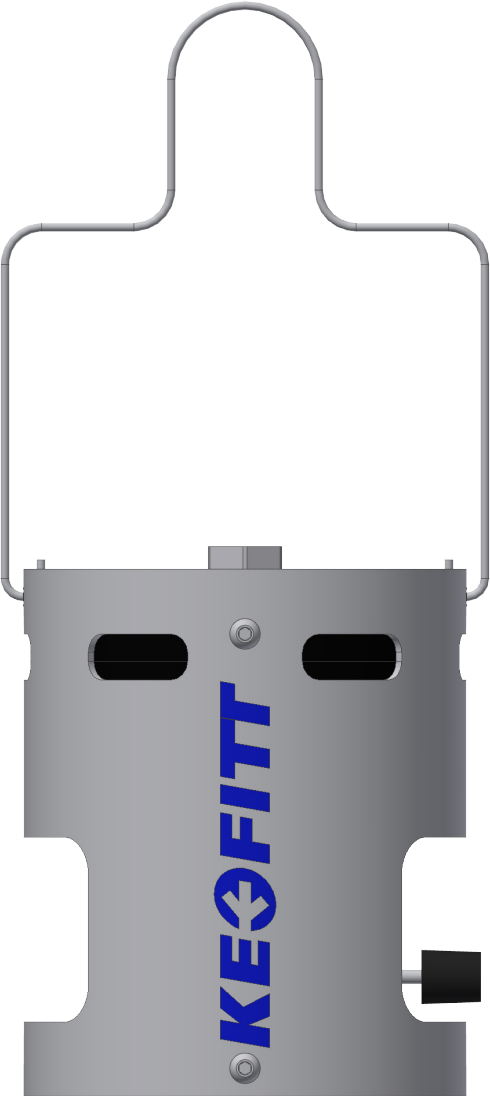KEOFITT STEAM BOILER



550000
STEAM BOILER



550002
PTFE TUNG W/QC 0.5M



550003
PTFE TUNG W/QC 1.0M



800830
O-RING SILCONE 10.3X2.4



150830
O-RING SILICONE 16X3



900031
HP W9/MALE THREAD M12



550242
BURNER STAND

KEOFITT CLIP-ON STEAMER




550009
CLIP-ON STEAMER

KEOFITT CARLSBERG FLASK




210001
CARLSBERG FLASK




550002
PTFE TUBING W/QC 0.5M



550003
PTFE TUBING W/QC 1.0M



600051
MEMBRANE SILICONE W9



550057
KÄRCHER/KEOFITT
ADAPTOR



800830
O-RING SILCONE
10.3X2.4




200210
FILTER FOR CARLSBERG
FLASK



900031
HP W9/MALE THREAD M12



900049
MEMBRANE BUTYL



900037
HP M4/MALE THREAD M12



900074
GASKET CLAMP 3/4"
EPDM

KEOFITT RECIRCULATOR



150010
RECIRCULATOR



150089
QC KSB/W9 HOSE BARB
Ø4



550311
BULB PUMP



550314
STEEL TOP



800088
QC W9 HOSE BARB Ø4

Exonder S.r.l
Via Zanoletti, 14 - 28040 Borgo Ticino (NO) Italy
Phone Number: +39 0321 908466
E-mail: customer-care@exonder.it
Website: www.exonder.it

KEOFITT A/S
Kullinggade 31
DK-5700 Svendborg
Denmark

Phone +45 6316 7080
www.keofitt.dk
www.sampling-school.com